


Controlled Pre-stretch Unit

Film rolls are loaded by placing the roll on the film mandrel and threading the film around the pre stretch roller and onto the load. Because of the simplicity of the design, the pre stretch head is safer and faster to use.

The pre stretch rollers are machined smooth allowing for high stretch levels regardless of film thickness.

The smooth surface is less aggressive on the film allowing the consumer to achieve the desired quality of wrap using much thinner films, saving on consumable costs.

Tough Poly Urethane pre stretch rollers are guaranteed to withstand normal wear and tear for the life of the machine.

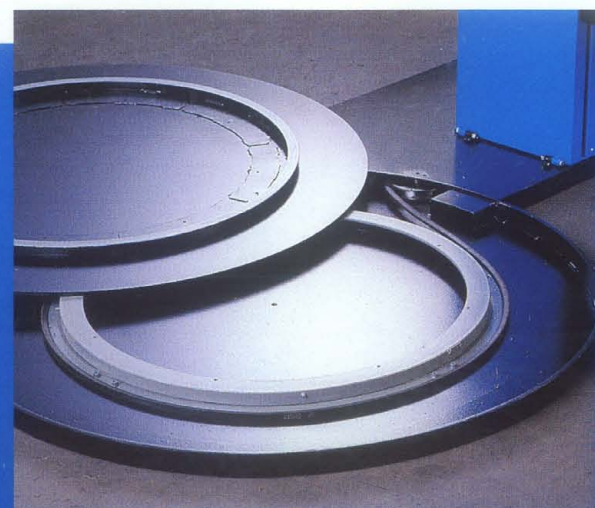


Turn-table.

Heavy duty ball turn-table bearing with a 3500 Kg capacity. Long life Vee belt drive. Belt runs on its own drive ring not on the bearing.

designed to
grow
with you

Push button station

User friendly controls allow the operator to readily understand the functions of the machine. To allow for easy maintenance the push buttons are Standard off the shelf items available.

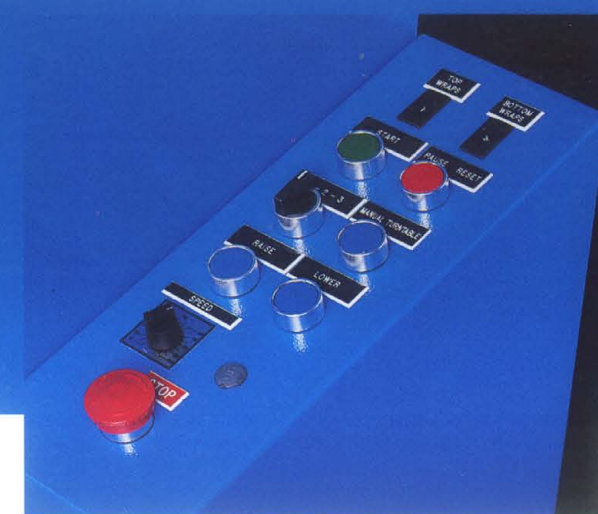

Electric's

PLC control.


Standard off the shelf parts used for ease of maintenance. Wrapping cycle can be tailored to suit the customers requirements. Full Manual control.



maximiser

Features

- Automatic wrap cycle
- Low profile.
- 2.5 Tonne turn-table capacity.
- 1500mm diameter turn-table.
- Variable carriage speed.
- Soft start turn-table.
- Wrap cycle select.
- Manual Turn-table jog function.
- Manual Carriage raise & lower function.
- Able to wrap 2.2M high.
- Adjustable top & bottom wraps.
- Photo eye to sense varying pallet heights.
- Fork lift transportable.
- Up to 25 Pallets per hour.
- All steel construction.
- 12 month conditional warranty.

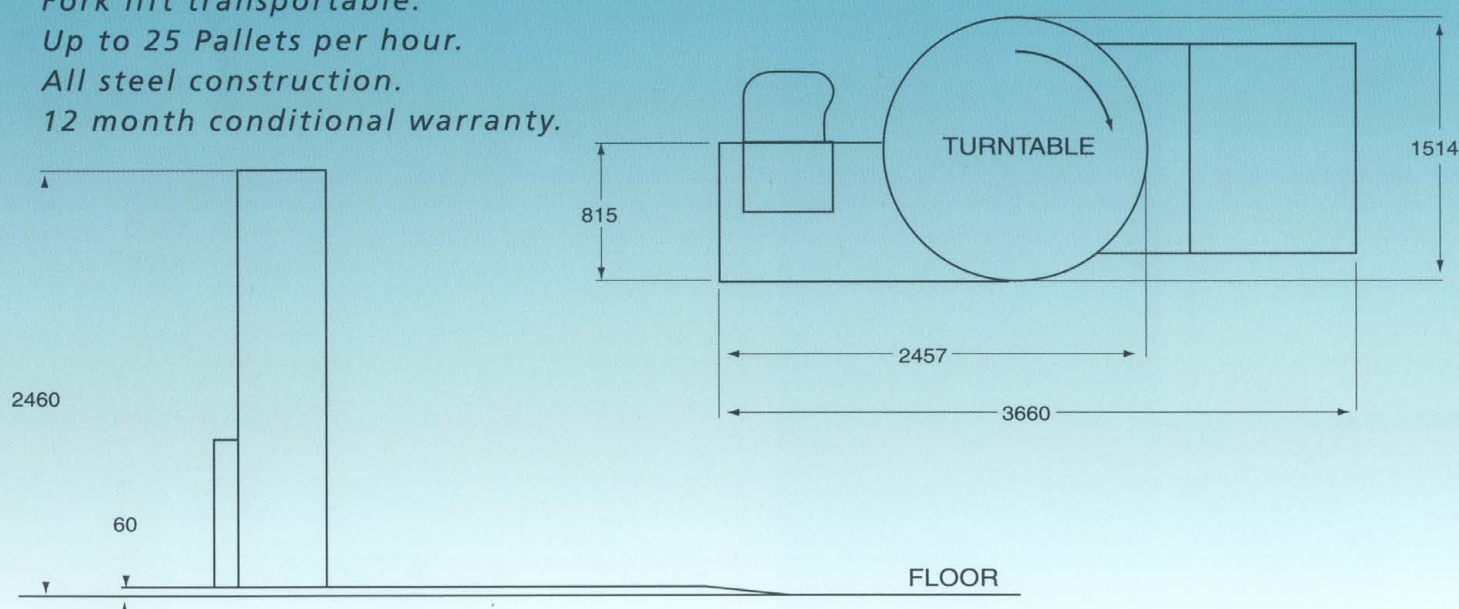

Optional Extras

- Control Stretch film head.
- Friction Brake film head.
- Power Control Stretch film head 200 % (1 mt to 3 mt) (including a feature to stop when film is broken.)
- Extended Column (2.8 M wrap high)
- Ramp
- Extended base

Inventing the Future in Stretchwrapping Equipment

For sales information and on site demonstrations contact Integrated Packaging on:

Melbourne Metro
Phone 03 9474 4344
Fax 03 9474 4399

National
Phone 1300 655 432
Fax 1300 651 098
Email: customer_service@ipstretch.com

For technical information and servicing information contact Integrated Machinery on:

Phone 03 9464 2822
Fax 03 9464 2866
Email: bills@imaust.com.au
website: www.imaust.com.au

For New Zealand sales, technical and servicing information contact Integrated Packaging on:

Auckland 0011 6492 744499
Wellington 0011 6456 53102
Christchurch 0011 6433 493058

Specifications

- Turn-table drive .75 Kw AC.
- Film carriage drive .37 Kw AC
- 240V 10 amp power connection.
- Turn-table speed 10 RPM.
- Shipping weight (approx) 700 kg



maximiser



growth & performance

as you grow

- User friendly.
- Space saver.
- Robust construction.
- Non dedicated parts for ease of maintenance.
- Safe to use.



12 MONTHS WARRANTY AND FULL SERVICE BACKUP



maximiser